



By CHS-ASIA CHEMICAL Co.,Ltd.


Your Partner To Go Green and Reliable



Product Using Manual

Rev. GNCSD011/2014

Manual using Greenex CSD in Cooling Tower

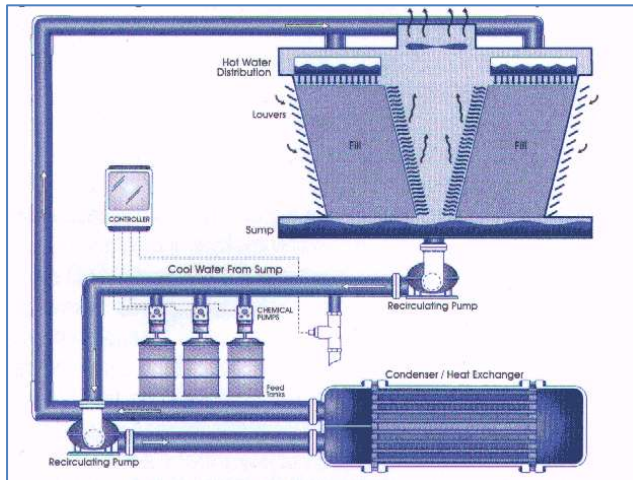

1. Check quantity of water in cooling tower system (Basin + Pipe line+ Reservoir + others)
2. Fill in Greenex CSD to basin every week by manual or dosing pump



Treat rate 500 ppm/m³/week

Water in Cooling Tower System(m ³)	Manual dosing Greenex CSD (ml)/week	Automatic dosing Greenex CSD (ml)/Month
0.5	250	1,000
1.0	500	2,000
1.5	750	3,000
2.0	1,000	4,000
2.5	1,250	5,000
3.0	1,500	6,000

3. Check temperature in/out, pH, Conductivity, TDS every day and record

Date	Temperature in (°C)	Temperature out (°C)	pH	Conductivity

Remark

High Conductivity not effect to system.

4. Check scale in basin every day (1st month) or weekly (after 1st month). If scale in basin in high level, take it out (because may cause blocking)



5. After dosing 1 month, clean system by Gun Spray high pressure



6. Keep dosing Greenex CSD and clean system when high scale in basin.

7. Keep check temperature in system.